

# Rate & Totalizing Display

Pulse Input



measuring  
•  
monitoring  
•  
analyzing

ZOE



2" Pipe Mounting Kit



- Battery Operated or External DC Power Supply
- LCD-Display, Background Lighting
- Pulse Input (NPN, PNP, NAMUR, or Reed Switch)
- Scalable Pulse Output
- Sensor Supply
- Fully Scalable
- Housings for Wall or Pipe Mounting



KOBOLD companies worldwide:

ARGENTINA, AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLOMBIA, CZECH REPUBLIC, EGYPT, FRANCE, GERMANY, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, SINGAPORE, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, TURKEY, UNITED KINGDOM, USA, VIETNAM

KOBOLD Instruments, Inc.  
1801 Parkway View Drive  
Pittsburgh, PA 15205  
Main Office:  
1.800.998.1020  
1.412.788.4890  
info@koboldusa.com  
www.koboldusa.com

## Description

The ZOE is specifically designed for the calculation and display of volumetric or mass flow rate & total. It operates via battery or an external power supply. The ZOE can be paired with flowmeters that have a pulse/frequency output. The electronic displays the flow rate, a resettable total, and a grand totalizer. Mass units can also be set. The ZOE is weather resistant and offers IP66/67 protection. The electronics are housed in a UV-resistant, glass-fibre reinforced plastic housing with stainless steel screws and FKM seals. The ZOE is suitable for harsh indoor or outdoor environments and complies with EU Directive 2004/108/EC for electromagnetic compatibility.

## Special Features

- Scalable, Resettable, Flow Rate & Totalizer
- Plastic Housing
- Universal Pulse Input
- Linearization Function
- Battery Powered with 3.6 V AA Lithium or 2x AA Standard Alkaline Batteries
- Optional Wall or Pipe Mounting

Additionally for ZOE-ZE:

- External Supply 9-28 V<sub>DC</sub>
- Scalable Pulse Output
- Sensor Supply
- Background Lighting for the Display

## Technical Details

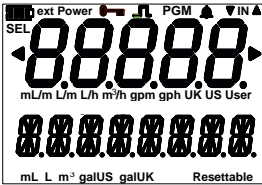
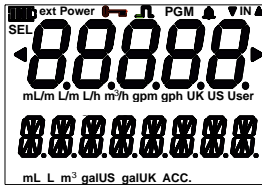
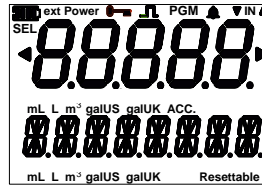
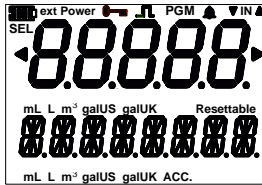
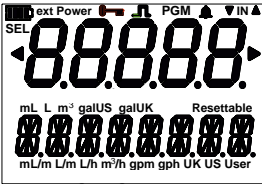
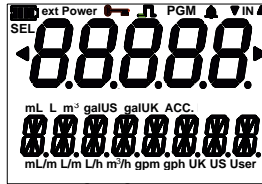
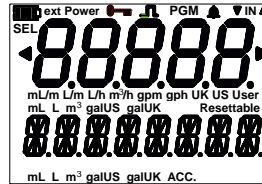
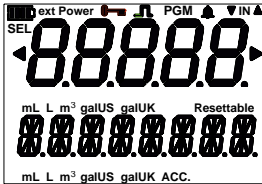
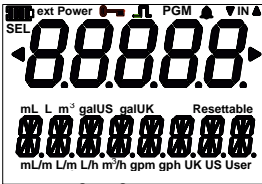
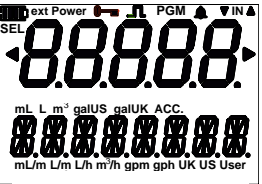
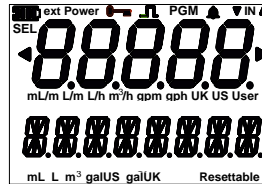
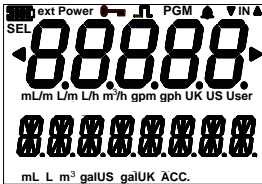
<b>External Supply:</b>	9-28 V <sub>DC</sub> Power Consumption Max. 40 mA (only ZOE-ZE)
<b>Battery for Operation:</b>	1x 3.6 V AA Lithium Batteries or 2x 1.5V AA Alkaline Batteries
<b>Battery Life:</b>	Using 3.6 V Lithium with 2200 mAh: up to 5 Years (at 50 µA); Using 2x Alkaline Batteries with 2600 mAh each: up to 2 Years (at 50 µA)
<b>Display:</b>	LCD Display (for ZOE-ZE), White Background Lighting) Height of Digits for 5-Digit Volume Flow: 0.51" (13 mm), 8-Digit Volume Totalizer: 0.31" (8 mm), Display of Battery Power
<b>Mounting Options:</b>	Meter Mount, Wall or Pipe Mounting
<b>Measuring Input*:</b>	Universal, Configurable (NPN, PNP, NAMUR Coil, Reed Switch or Active) Input Frequency: 0.1 ... 1000 Hz, High-Low-Threshold 1 V <sub>DC</sub>



<b>Measured Rate:</b>	1 s
<b>Volume Flow Units:</b>	GPM, GPH, ml/m, l/m, l/h, m³/h, or User-defined
<b>Units for Volume Totalizer:</b>	Gal, ml, l, m³, or User-defined
<b>Control Input (only ZOE-ZE..3):</b>	for Resettable Totalizer
<b>Linearization:</b>	1 ... 9 Interpolation Points, can be Deactivated
<b>Accuracy of Volume Flow Measurement:</b>	< 0.1% of Reading (Depending on Scaling and Resolution)
<b>Sensor Supply (only ZOE-ZE..3):</b>	8 V <sub>DC</sub> , Max. 25 mA (for External Supply > 10 V <sub>DC</sub> )
<b>Pulse Output (only ZOE-ZE..3):</b>	NPN, Open Collector, Max. 30 V <sub>DC</sub> , Max. 50 mA
<b>Operation:</b>	4 Buttons
<b>Housing:</b>	Plastic, PA6, GF-reinforced
<b>Protection:</b>	IP 66/67
<b>Cable Entry:</b>	3x M20 x 1.5 or ½" NPT (Prepared)
<b>Electrical Connection:</b>	Plug-in Terminals Wire Size Max. 0.75 mm²
<b>Retention of Meter Readings in Case of Power Failure:</b>	Cyclic, Non-volatile Memory
<b>Ambient Temp:</b>	-4°F ≤ T <sub>ambient</sub> ≤ 176°F
<b>Storage Temp:</b>	-13°F ≤ T <sub>storage</sub> ≤ 176°F (without Battery)

\*For battery operation: passive reed switches can be used as sensor. Usage of induction coils with high sensitivity (amplitude < 30mV pp) can result in an increase of the minimal range value. Other sensors requiring sensor supply for operation cannot be used for battery operation.


## Configurable Display Layouts

<b>Rate/Resettable Total</b> 	<b>Rate/Grand Total</b> 	<b>Grand Total/Resettable Total</b> 	<b>Resettable Total/Grand Total</b> 
<b>Resettable Total/Rate</b> 	<b>Grand Total/Rate</b> 	<b>Alt/Grand Total</b>  <p>For this layout, the bigger display will alternate b/w partial totalizer and flow, while the smaller display is fixed and will show accumulated totalizer.</p>	<b>Resettable Total/Alt</b>  <p>For this layout, the smaller display will alternate b/w accumulated total and flow, while the bigger display is fixed and will show partial totalizer.</p>
<b>Alt/Rate</b> 	 <p>For this layout, the bigger display will alternate b/w partial and accumulated total, while the smaller display is fixed.</p>	<b>Rate/Alt</b> 	 <p>For this layout, the smaller display will alternate b/w partial and accumulated total, while the bigger display is fixed.</p>

Configuration	5-Digit Larger Display	8-Digit Smaller Display
Rate/Resettable Total	Rate Display	Resettable Total Display
Grand Total/Resettable Total	Grand Total Display	Resettable Total Display
Resettable Total/Rate	Resettable Total Display	Rate Display
Alternating/Grand Total	Alternating Display between Rate Display and Resettable Total Display	Grand Total Display
Alternating/Rate	Alternating Display between Grand Total and Resettable Total	Rate Display
Rate/Grand Total	Rate Display	Grand Total Display
Resettable Total/Grand Total	Resettable Total Display	Grand Total Display
Grand Total/Rate	Grand Total Display	Rate Display
Resettable Total/Alternating	Resettable Total Display	Alternating between Grand Total Display and Rate Display
Rate/Alternating	Rate Display	Alternating between Grand Total Display and Resettable Total Display



## Rate & Totalizing Display Model ZOE

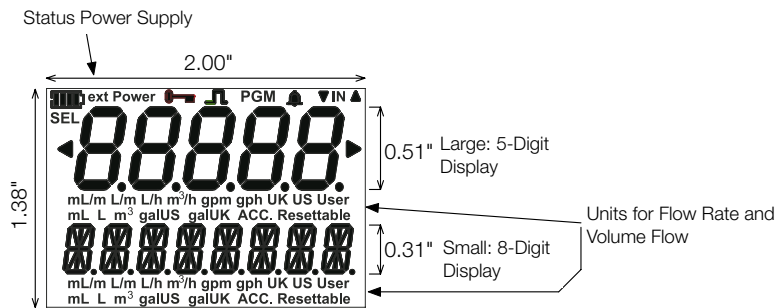

### Order Details (Example: ZOE-ZE K MF 30 0)

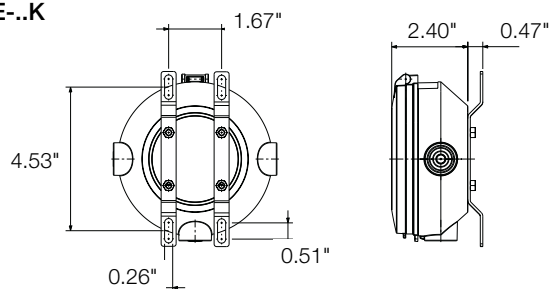
Model	Electronics	Housing Type	Electrical Connection/ Cable Gland	Power Supply	Options
ZOE-	..ZB.. = Rate Totalizer Battery Powered	..0.. = Universal Mount (Standard, Round Plastic without Mounting Plates, without Holes)	..MF.. = 3x M20 x1.5 Cable Entry	..B0 <sup>1)</sup> .. = Battery for Operation	..0 = No Options
	..ZE.. = Rate Totalizer Battery Powered & Externally Powered	..K.. = Universal Mount (Standard, Round Plastic with Mounting Plates)  ..M.. = Universal Mount (Round Plastic for Retrofitting DON)	..NF.. = 3x 1/2" NPT Cable Entry	..30 <sup>2)</sup> .. = 9-28 V <sub>DC</sub> , Battery for Operation, Pulse Output	

<sup>1)</sup> Only available with ZOE-ZB

<sup>2)</sup> Pulse output, sensor supply, and LCD backlight only with external power supply ZOE-ZE

### Dimensions

#### ZOE-..K



### Accessories

Description	Model
Stainless Steel Wall Mounting Kit	ERS-ZOK-023618
Stainless Steel 2" Pipe Mounting Kit	ERS-ZOK-003402

#### ZOE-..M, ZOE-..0

